

INSURICE® SINGLE PF - i20002 SYSTEM

DELIVERS QUALITY WATER FOR ICE APPLICATIONS

Insurice Single PF-i20002 System: EV9324-21
i20002 Replacement Cartridge: EV9612-22
EC210 Prefilter Cartridge: EV9534-26



APPLICATIONS

- ◆ Ice machines
 - Cubers 750 lbs./day
 - Flakers 1,500 lbs./day

FEATURES • BENEFITS

- ◆ Reduces water-related ice machine problems caused by scale buildup from dirt and dissolved minerals*
- ◆ Easy, sanitary, quick-change filter replacement
- ◆ Reduces scale* and clogging of distribution lines, evaporator plate and pump
- ◆ Exclusive precoat filtration provides chlorine taste & odor reduction and micro-filters dirt and particles as small as 0.2 μ microns in size by mechanical means
- ◆ Proprietary Pentair™ Everpure™ Micro-Pure® II filtration media effectively inhibits the growth of bacteria on the filter media that can decrease product life
- ◆ 20" prefilter reduces dirt and particles
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means

INSTALLATION TIPS

- ◆ Choose a mounting location suitable to support the full weight of the system when operating.
- ◆ Never use a saddle valve for connection.
- ◆ Use 3/4" water line.
- ◆ Do not connect system to water-cooled condenser.
- ◆ Install vertically with cartridges hanging down. Allow 2 1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.
- ◆ Flush cartridges by running water through system for five (5) minutes at full flow.

OPERATION TIPS

- ◆ Change cartridges on a regular six (6) month preventative maintenance program.
- ◆ Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).
- ◆ Service flow rate must not exceed 1.67 gpm (6.3 Lpm).
- ◆ Always flush the filter cartridge at time of installation and cartridge change.
- ◆ Inspect EC210 cartridge periodically to determine dirt load.
- ◆ Replace EC210 cartridge when dirt has penetrated through to the inner core of the cartridge.

SIZING

- ◆ Service Flow Rate:
Maximum 1.67 gpm (6.3 Lpm)
- ◆ Capacity: 9,000 gallons (34,069 L)

* As tested by Pentair.


Validated by ISO 17025 accredited lab for 99.999% reduction of *Pseudomonas diminuta* following the ASTM F838-05 protocol for the validation of 0.2 μ m sterilizing grade filters.

EPA Est. No. 002623-IL-002

INSURICE® SINGLE PF - i20002 SYSTEM

EV9324-21

Insurice Single PF-i20002 System: EV9324-21
i20002 Replacement Cartridge: EV9612-22
EC210 Prefilter Cartridge: EV9534-26

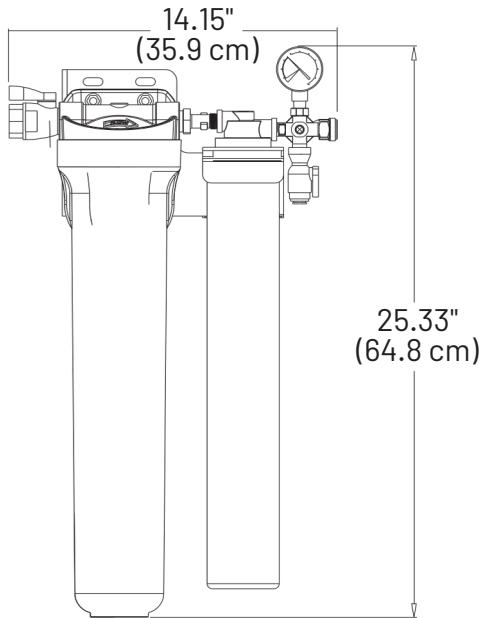

SPECIFICATIONS

◆ Service Flow Rate

Maximum 1.67 gpm (6.3 Lpm)

◆ Rated Capacity

9,000 gallons (34,069 L)

◆ Pressure Requirements

10 – 125 psi (0.7 – 8.6 bar), non-shock

◆ Temperature

35 – 100°F (2 – 38°C)

◆ Overall Dimensions

25.33" L x 14.5" W x 6.47" D
(64.8 x 35.9 x 16.4 cm)

◆ Inlet Connection

Inlet Connection: 3/4"

◆ Outlet Connection

Outlet Connection: 3/8"

◆ Operating Weight

19 lbs (8.6 kgs)

◆ Shipping Weight

10 lbs (4.5 kgs)

◆ Electrical Connection

None required



System Tested and Certified by NSF International against NSF/ANSI Standards 42 and 53 for the reduction of:

STANDARD NO. 42 –
AESTHETIC EFFECTS

Chemical Reduction

Taste & Odor
Chlorine

Mechanical Filtration

Nominal Particulate Class I

STANDARD NO. 53 –
HEALTH EFFECTS

Mechanical

Filtration
Cyst

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.

For Pentair Everpure Product Warranties visit:
<http://pentair.com/assets/foodservice-warranty>



Authorized distributor

AQUALITY Intelligent Solutions Pvt. Ltd



8-1-284/OU/566, 2nd Floor, OU Colony, Shaikpet, Hyderabad,
Telangana, India, 500008

+91 70938 98486 | sales@aquality.in | aquality.co.in



United States | 1040 Muirfield Drive | Hanover Park, IL 60133 | 800.942.1153 (US Only) 630.307.3000 Main | cseverpure@pentair.com | foodservice.pentair.com

Australia | 1-21 Monash Drive | Dandenong South, Vic 3175 | Australia | 011.1300 576 190 Tel | au.everpure@pentair.com

China | 21F Cloud 9 Plaza, NO 1118 | Shanghai, 200052 | China | 86.21.3211.4588 Tel | china.water@pentair.com

India | Boulevard, B-9/A, 7th Floor - Tower B Sector 62 | Noida - 201301 | 91.120.419.9444 Tel | indiacustomer@pentair.com

Europe | Pentair Water Belgium BVBA | Industriepark Wolfstee, Toekomstlaan 30, B-2200 Herentals | Belgium | +32.(0).14.283.504 Tel | sales@everpure-europe.com

Japan | Japan Inc. | Hashimoto MN Bldg. 7F, | 3-25-1 Hashimoto, Midori-ku, Sagami-hara-shi | Kanagawa 252-0143 | Japan | 81.(0)42.775.3011 Tel | info@everpure.co.jp

Southeast Asia | 390 Havelock Road, | #04-01 King's Centre | Singapore 169662 | 65.6768.5800 Tel | cseverpure@pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

©2021 Pentair. All Rights Reserved.

EV9324-21 AU21