

EVERPURE® COLDRINK® 1-MC2 SYSTEM

DELIVERS PREMIUM QUALITY WATER FOR FOUNTAIN APPLICATIONS

Coldrink 1-MC2 System: EV9328-01
MC2 Replacement Cartridge: EV9612-56
EC210 Prefilter Cartridge: EV9534-26



APPLICATIONS

Fountain Beverage
Single-Carbonator Dispensers

Dispensers Using Up To 25 Tanks Of Syrup
or Bag-In-Box Per Month

FEATURES • BENEFITS

Improves the taste of fountain beverages and helps retain the drink's carbonation
Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination
Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear
Proprietary Micro-Pure® II filtration media effectively inhibits the growth of bacteria on the filter media that can decrease product life
Exclusive precoat filtration provides superior chlorine taste & odor reduction and micro-filters dirt and particles as small as 0.2* micron in size by mechanical means

Reduces chlorine taste & odor and other offensive contaminants
Plated mounted system allows for easy installation and startup
20" prefilter reduces dirt and particles
NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means
* Validated by ISO 17025 accredited lab for 99.999% reduction of *Pseudomonas diminuta* following the ASTM F838-05 protocol for the validation of 0.2 µm sterilizing grade filters

INSTALLATION TIPS

Choose a mounting location suitable to support the full weight of the system when operating.
Never use saddle valve for connection. Use 3/4" water line. Install vertically with cartridges hanging down.
Allow 2 1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.
Flush cartridges by running water through system for five (5) minutes at full flow.

OPERATION TIPS


Change cartridges on a regular six (6) month preventative maintenance program. Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar). Always flush the filter cartridge at time of installation and cartridge change.
Inspect Everpure EC210 Cartridge periodically to determine dirt load.
Replace Everpure EC210 Cartridge when dirt has penetrated through to the inner core of the cartridge.

SIZING

Service Flow Rate: Maximum 1.67 gpm (6.3 Lpm)
Capacity: 9,000 gallons (35,069 L)

EVERPURE® COLDRINK® 1-MC2 SYSTEM

EV9328-01

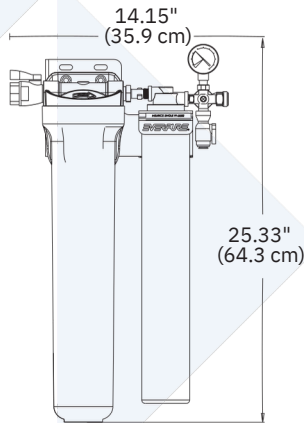

EPA Est. No. 002623-IL-002

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.

SPECIFICATIONS

Rated Capacity 9,000 gallons
(35,069 L)

Service Flow Rate

Maximum 1.67 gpm (6.3 Lpm)

Pressure Requirements

10 – 125 psi (0.7 – 8.6 bar), non-shock

Temperature

35 – 100°F (2 – 38°C)

Overall Dimensions

25.33" H x 14.15" W x 6.74" D
(64.3 cm x 35.9 cm x 17.1 cm)

Inlet Connection

3/4"

Outlet Connection

3/4"

Operating Weight

19 lbs (8.6 kgs)

Shipping Weight

10 lbs (4.5 kgs)

Electrical Connection

None required



System Tested and Certified by NSF International against NSF/ANSI Standards 42 and 53 for the reduction of:

STANDARD NO. 42 –
AESTHETIC EFFECTS
Chemical Reduction

Taste & Odor
Chlorine

Mechanical Filtration
Nominal Particulate Class I

STANDARD NO. 53 –
HEALTH EFFECTS
Mechanical Filtration
Cyst

WARRANTY

Everpure water treatment systems by Pentair® (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Pentair will provide a copy of the warranty upon request.



WATER QUALITY SYSTEMS EVERPURE-SHURFLO WORLD HEADQUARTERS, 1040 MUIRFIELD DRIVE, HANOVER PARK, IL 60133 USA • FOODSERVICE.PENTAIR.COM 800.942.1153 (US ONLY) • 630.307.3000 MAIN • 630.307.3030 FAX • CSEVERPURE@PENTAIR.COM EMAIL EVERPURE-SHURFLO AUSTRALIA, 1-21 MONASH DRIVE, DANDENONG SOUTH, VIC 3175 AUSTRALIA 011.1300 576 190 TEL • 011.61.39.562.7237 FAX • AU.EVERPURE@PENTAIR.COM EMAIL EVERPURE-SHURFLO CHINA, 21F CLOUD 9 PLAZA, NO 1118, SHANGHAI, 200052, CHINA 86.21.3211.4588 TEL • 86.21.3211.4580 FAX • CHINA.WATER@PENTAIR.COM EMAIL EVERPURE-SHURFLO INDIA, GREEN BOULEVARD, B-9/A, 7TH FLOOR - TOWER B SECTOR 62, NOIDA - 201301 91.120.419.9444 TEL • 91.120.419.9400 FAX • INDIACUSTOMER@PENTAIR.COM EMAIL EVERPURE-SHURFLO EUROPE, PENTAIR WATER BELGIUM BVBA, INDUSTRIEPARK WOLFSTEE, © 2016 Pentair Filtration Solutions, LLC. All Rights Reserved.



Authorized distributor

AQUALITY Intelligent Solutions Pvt. Ltd



8-1-284/OU/566, 2nd Floor, OU Colony, Shaikpet, Hyderabad, Telangana, India, 500008

+91 70938 98486 | sales@aquality.in | aquality.co.in