

# TECHNICAL SHEET

FLECK  
9100 TWIN VALVE SERIE



FILTRATION SOLUTIONS



## FLECK VALVE TWIN SERIE - 9100

### TECHNICAL CHARACTERISTICS

- Continuous soft water provision with only one tank in use, other being in regeneration or stand-by
- Regeneration with softened water
- Valve body in PPO, corrosion-proof
- Fast connection of the second tank, with connecting pipes in PVC delivered with the valve
- Optional : upflow regeneration



### VALVE SPECIFICATION

Material	PPO*
Hydrostatic pressure	20 bar
Working pressure	1.8 - 8.5 bar
Working temperature	1 - 43 °C
Electrical rating	24 V / 50 or 60 Hz, other upon request
Protection index	IP 22
Certificates	2004/108/CE, Electromagnetic compatibility 2006/95/CE, Low voltage D.M. 174/04, Italian norm

### FLOW RATE (3.5 BAR INLET - VALVE ALONE)

	¾ inch	1 inch
Continuous ( $\Delta p = 1$ bar)	4 m <sup>3</sup> /h	4.5 m <sup>3</sup> /h
Peak ( $\Delta p = 1.8$ bar)	5.4 m <sup>3</sup> /h	5.9 m <sup>3</sup> /h
Cv*	4.8 gpm	5.2 gpm
Maximum backwash ( $\Delta p = 1.8$ bar)	1.9 m <sup>3</sup> /h	1.9 m <sup>3</sup> /h

\* Cv: Flow rate of valve alone in gpm at 0.07 bar pressure drop.

### DOWN FLOW REGENERATION

	Mechanical	Electronic
Cycles	Adjustable	Adjustable
Time available	199 min	

## CONNECTIONS - DIMENSION

Inlet / outlet	¾ or 1 inch BSP
Distributor tube	26.7 mm (1 inch)
Drain line	½ inch
Brine line 1600	¾ inch
Mounting base	2 ½ inches - 8 NPSM
Height (from top of tank)	185 mm
<b>Tank size application (recommended)</b>	
Water softener	6 - 16 inches (150 - 400 mm)

## METER

	¾ inch	1 inch
Accuracy range (± 5%)	1 - 57 Lpm	2.6 - 151 Lpm
Standard capacity range	0.5 - 8 m³	1 - 20 m³
Extended capacity range	2.5 - 40 m³	5 - 100 m³


## REGENERATION CYCLES

Down flow	Upflow
1) Brine and slow rinse (Upflow)	1) Backwash (Upflow)
2) Backwash (Upflow)	2) Brine and slow rinse (Down flow)
3) Rapid rinse (Down flow)	3) Rapid rinse (Down flow)
4) Brine tank refill	4) Brine tank refill
5) Service	5) Service

## OPTIONS

Regeneration	Upflow
Electronic	ET, SXT
Mixing	Yes
By-pass	Valve ¾ inch

## DIMENSIONS

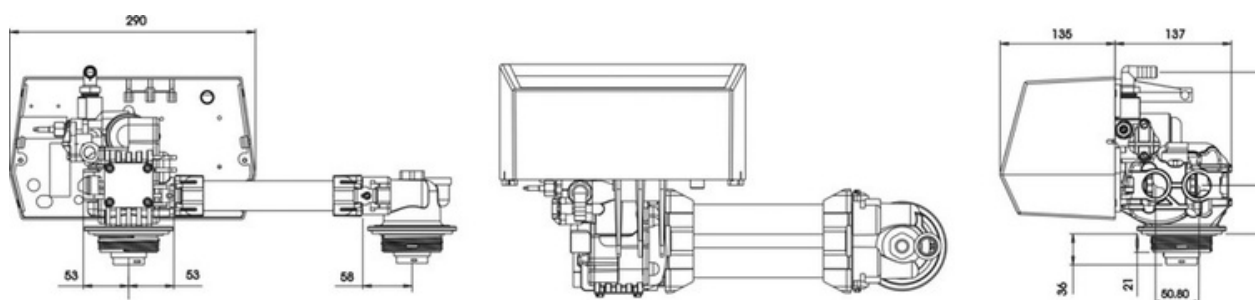



**Authorized distributor**

**AQUALITY Intelligent Solutions Pvt. Ltd**



8-1-284/OU/566, 2nd Floor , OU Colony, Shaikpet, Hyderabad,  
Telangana, India, 500008

+91 70938 98486 | [sales@aquality.in](mailto:sales@aquality.in) | [aquality.co.in](http://aquality.co.in)