



Authorized distributor



Aquality Intelligent Solutions Pvt. Ltd

8-1-284/OU/566, 2nd Floor, OU Colony, Shaikpet, Hyderabad, Telangana, India, 500008

+91 70938 98486 | sales@aquality.in | aquality.co.in



Pentair Offices in South East Asia

390 Havelock Road #04-01 King's Centre Singapore 169662 Tel: +6567685900

5th Floor MAIA Suites 1747 Nicanor Garcia Street corner

16th Floor, The Ninth Towers Grand RAMA 9, Tower B 33/4 Rama 9 Road, Huaykwang Bangkok 10310, Thailand Tel: +6621681092

D.Oliman Street Makati City, Philippines Tel: +632824 3825






Clean Water for the Whole House Pentair Backflush Prefilter



Frontline filtration for Purified Water High-flow, high-precision




pre-filtration

Effectively removes large particles such as dirt and rust to protect terminal water purification equipment.

40 µm precision prefilter provides water that is clean and safe Effective filtration without filter blockage issues.

3 m³/h flow rate ensures enough water for the whole family Satisfies your family's water usage needs.

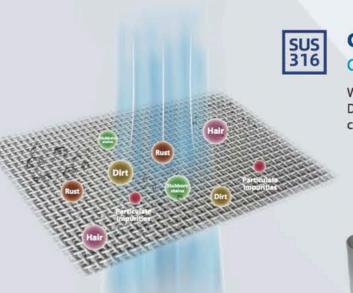

*Filtered particles refer to pollutants larger than 40 microns.

Grade 316 Stainless Steel Filter

One System with Double the Protection

Wear resistant, corrosion resistant, and rust resistant. Double stainless steel filters for worry-free filtration and





Rinses Twice for Absolute Cleanliness



Backflush rinsing instantly clears away pollutants

Switch water flow instantly for excellent pollutant removal performance

Filtration

Water flows into the system and passes through the filter which stops impurities.



Backflush

When the direction of flow is changed, water flows through the backflush filter and forces impurities caught in the main filter's external wall outwards.

Backflush rinses the lower stainless steel filter from the inside out, effectively dislodging any impurities caught in the filter's surface.



larger than 40 microns.



360° Spinning Scraper **Cleans a Second Time**

For a more thorough clean

Spinning scraper cleans a second time after backflushing Stubborn pollutants are further scraped away to ensure a thorough clean.



Flow of

*Filtered particles refer to pollutants larger than 40 microns.

User-friendly Design Durable and Thoughtful



Auxiliary monthly recording dial

User-friendly design for convenient recording of rinsing by month



Front-facing precision pressure gauge

Easily monitor water pressure in real time at a glance



High-strength transparent filter housing

Provides a clear view of impurities and particulates



Rapid backflush design

Simply open the drainage valve to start backflushing, and quickly and conveniently rinse the filter and housing



Product Model	BB3011-00
Product Dimensions (mm), H x W x D	293x169x8
Micron Rating (μm)	40
Clean water flow rate (m3/h)	3.0

1000 Capacity (m3) 14.5 - 72.5 PSI (1 - 5 bar) Inlet Water Pressure (PSI) Operating Temperature* (°C)

* Do no place the product under direct sunlight or outdoor (Health permit no. line deleted)

