

MH2 FILTER CARTRIDGE

DELIVERS QUALITY WATER FOR COFFEE APPLICATIONS

MH2 Replacement cartridge: EV9613-21



APPLICATIONS

- ◆ Coffee
 - High-flow, higher-volume brewers

FEATURES • BENEFITS

- ◆ Easy, sanitary, quick-change filter replacement
- ◆ Saves energy by reducing scale buildup*
- ◆ Inhibits limescale buildup in water using equipment*
- ◆ Exclusive precoat filtration provides chlorine taste & odor reduction, and micro-filters dirt and particles as small as 0.2*-microns in size by mechanical means
- ◆ Proprietary Pentair™ Everpure™ Micro-Pure® II filtration media effectively inhibits the growth of bacteria on the filter media that can decrease product life
- ◆ NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means

INSTALLATION TIPS

- ◆ Install vertically so cartridge hangs down.
- ◆ Allow 21/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.
- ◆ Flush filter by running water through filter according to cartridge instructions.

OPERATION TIPS

- ◆ Replace cartridge when flow rate becomes inconveniently slow or before rated capacity is reached. It is recommended to replace cartridge at least once per year.
- ◆ Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).
- ◆ Always flush the filter cartridge at time of installation and cartridge change.

SIZING

- ◆ Service Flow Rate:
Maximum 1.67 gpm (6.3 Lpm)
- ◆ Rated Capacity:
9,000 gallons (34,068 L) or approximately 18,000 pots

*As tested by Pentair

† Validated by ISO 17025 accredited lab for 99.999% reduction of *Pseudomonas diminuta* following the ASTM F838-05 protocol for the validation of 0.2 µm sterilizing grade filters.


EV9613-21 MH2 FILTER CARTRIDGE SPECIFICATION SHEET

EPA Est. No. 002623-IL-002

MH2 FILTER CARTRIDGE

EV9613-21

MH2 Replacement cartridge: EV9613-21

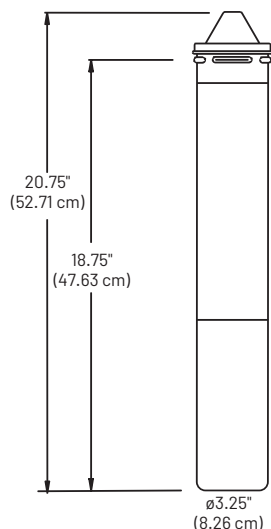

SPECIFICATIONS

◆ Service Flow Rate

Maximum 1.67 gpm (6.3 Lpm)

◆ Rated Capacity

9,000 gallons (34,068 L) or
approximately 18,000 pots

◆ Pressure Requirements

10 – 125 psi (0.7 – 8.6 bar), non-shock

◆ Temperature

35 – 100°F (2 – 38°C)

◆ Overall Dimensions

20.75" L x 3.25" D
(52.71 cm x 8.26 cm)



System Tested and Certified by NSF International against NSF/ANSI Standards 42 and 53 for the reduction of:

STANDARD NO. 42 –
AESTHETIC EFFECTS
Bacteriostatic Effects
Chemical Reduction
Taste & Odor
Chlorine

STANDARD NO. 53 –
HEALTH EFFECTS
Mechanical
Filtration
Cyst
Asbestos

Mechanical Filtration
Nominal Particulate Class I



EPA Est. No. 002623-IL-002

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.

For Pentair Everpure Product Warranties visit:
<http://pentair.com/assets/foodservice-warranty>

Authorized distributor

Aquality Intelligent Solutions Pvt. Ltd



8-1-284/OU/566, 2nd Floor, OU Colony, Shaikpet, Hyderabad,
Telangana, India, 500008

+91 70938 98486 | sales@aquality.in | aquality.co.in



United States | 1040 Muirfield Drive | Hanover Park, IL 60133 | 800.942.1153 (US Only) 630.307.3000 Main | cseverpure@pentair.com | foodservice.pentair.com

Australia | 1-21 Monash Drive | Dandenong South, Vic 3175 | Australia | 011.1300 576 190 Tel | au.everpure@pentair.com

China | 21F Cloud 9 Plaza, NO 1118 | Shanghai, 200052 | China | 86.21.3211.4588 Tel | china.water@pentair.com

India | Boulevard, B-9/A, 7th Floor - Tower B Sector 62 | Noida - 201301 | 91.120.419.9444 Tel | indiacustomer@pentair.com

Europe | Pentair Water Belgium BVBA | Industriepark Wolfstee, Toekomstlaan 30, B-2200 Herentals | Belgium | +32.(0)14.283.504 Tel | sales@everpure-europe.com

Japan | Japan Inc. | Hashimoto MN Bldg. 7F, | 3-25-1 Hashimoto, Midori-ku, Sagamihara-shi | Kanagawa 252-0143 | Japan | 81.(0)42.775.3011 Tel | info@everpure.co.jp

Southeast Asia | 390 Havelock Road, | #04-01 King's Centre | Singapore 169662 | 65.6768.5800 Tel | cseverpure@pentair.com